


MODEL NAME	JIIIU3 1224	Jii lu3 1550	Jii lu 3 17 37	Jii lus 2130
TABLE WIDTH	1200	1500	1700	2100
TABLE LENGTH	2400	3000	3700	5000
WORKING AREA / ROLLER WIDTH	1140	1440	1640	2040
WORKING AREA LENGTH	2150	2750	3450	4750
HDC BUBBLEFREE ROLL	Yes	Yes	Yes	Yes
ROLL DIAMETER	136	136	136	136
WORK HEIGHT	890	890	890	890
WEIGHT	200	350	450	00
MAX. THICKNESS OF MEDIA MATERIAL	0- 70 mm	0- 70 mm	0- 70 mm	0- 70 mm
2-LAYER TEMPERED LAMINATED GLASS SURFACE	Yes	Yes	Yes	Yes
SIDE TRAYS	Yes	Yes	Yes	Yes
WHEELS (WITH BRAKE)	Yes	Yes	Yes	Yes
SELF-HEALING CUTTING MAT	Yes	Yes	Yes	Yes
CARRIAGE ROLL HOLDER	Yes	Yes	Yes	Yes
TABLE END ROLL HOLDER	Yes	Yes	Yes	Yes
WARRANTY	3 Years	3 Years	3 Years	3 Years
VROLLER UPGRADE OPTIONS				
LED ILLUMINATION	$\overline{}$	$\overline{}$	$\overline{}$	$\overline{}$
LEVELLING FEETS	$\overline{}$	$\overline{}$	$\overline{}$	$\overline{}$
SECOND ROLL CARRIAGE	$\overline{}$	$\overline{}$	$\overline{}$	
SILENT AIR COMPRESSOR	$\overline{}$		$\overline{}$	$\overline{}$
MDF FLATBED SURFACE				

VROLLER® CAN BE PRODUCED WITH CUSTOM CUSTOMER SIZE.













8F

HDC BUBBLEFREE ROLL GUARANTEED QUALITY **SAVES UP TO 85% PRODUCTION TIME CAMPARED WITH HAND APPLICATION**







HDC BUBBLEFREE ROLL



USER-FRENDLY CONTROL




DURABLE LINEAR SYSTEM



SIDE TRAYS




CARRIAGE ROLL HOLDER



3MM CUTTING MAT



TABLE END ROLL HOLDER

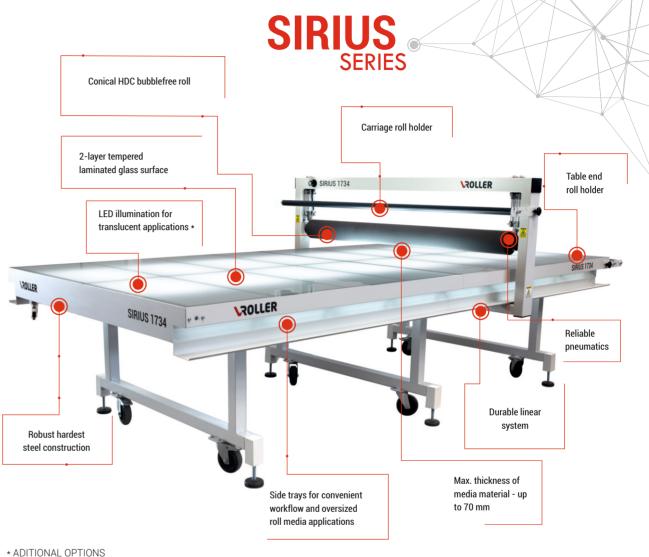

"ADITIONAL OF HONE

Advantages of working with the Vroller flatbed applicator

- Cost-effectiveness (reduced labour costs, time saving). In most cases, ease of use enables one person
 to perform the work, which leads to significant savings in time and money.
- High quality of the final product: a perfectly flat surface with no bubbles, creases or wrinkles with HDC roll.
- Improving the working conditions for the operator (ergonomic working position).
- Ease of use (manual delivered with the applicator, which enables the operator to learn to use the device in less than an hour).
- The device may be equipped with a second carriage with pressure rollers, which allows using one
 applicator as two work areas.
- Possibility to work on projects of varying degree of complexity.
- Stability, reliability and durability.
- Best solution in its class.
- Quick return on investment.
- Full compliance with standards EVS-EN 60598, EVS-EN 55015.

